

MODEL TL-4920



International size reference: C, ER26500

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



- Nominal capacity @ 3 mA, to 2 V 8.5 Ah
 - Rated voltage 3.6 V
 - Maximum recommended continuous current 75 mA
 - Maximum 1 sec. pulse capability 200 mA
 - Weight 49.5 g (1.746 oz)
 - Volume 26 cc
 - Operating temperature range -55 °C to +85 °C
- U.L. Component Recognition, MH 12193

TADIRAN
LITHIUM
BATTERIES

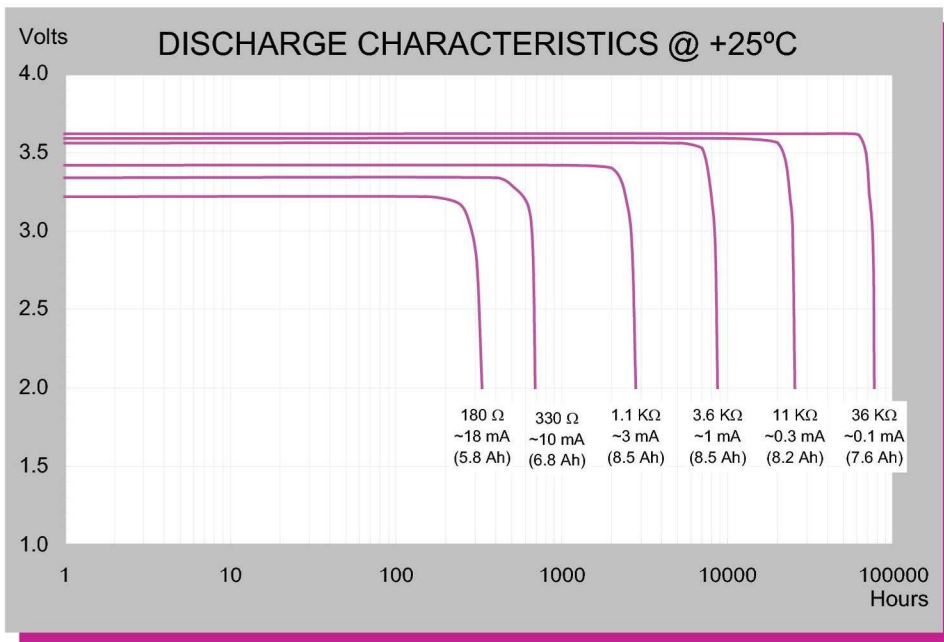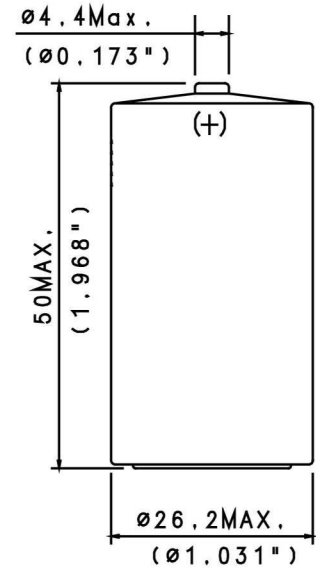

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-4920-21000
SUFFIX- /T SOLDER TABS	15-4920-31000

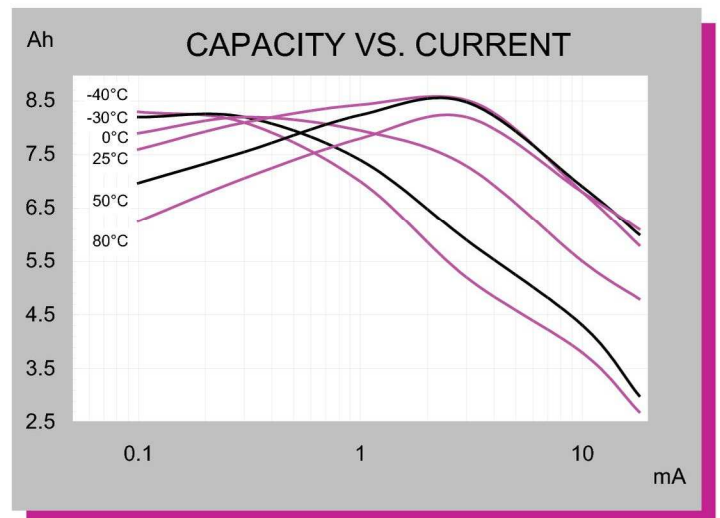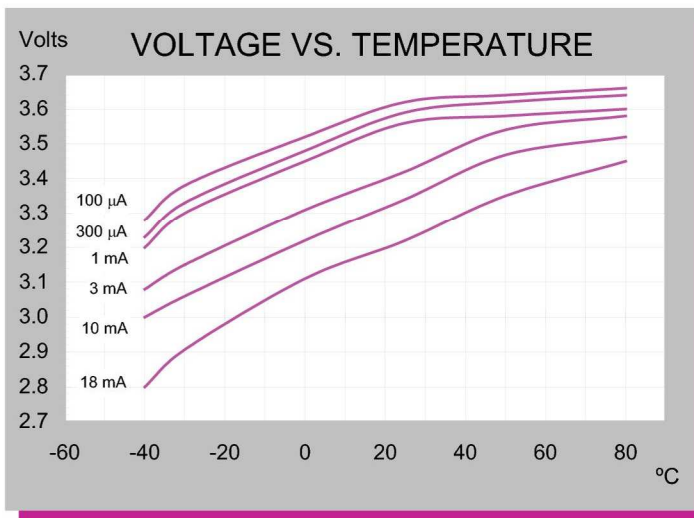

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501174 Rev. C 01/06