

MODEL TL-5930



International size reference: D, ER32L615

TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)



■ Nominal capacity @ 4 mA, to 2 V	19 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	230 mA
■ Maximum pulse current capability	500 mA
■ Weight	93 g (3.28 oz)
■ Volume	51 cc
■ Operating temperature range	-55 °C to +85 °C
■ Li metal content	approx. 5 g
■ U.L. Component Recognition, MH 12193	

TADIRAN
LITHIUM
BATTERIES

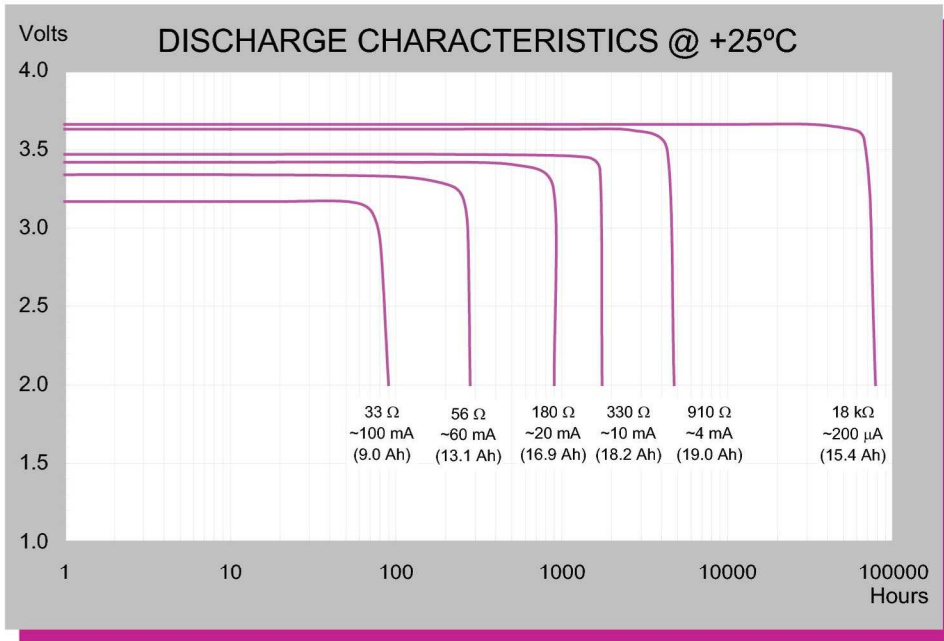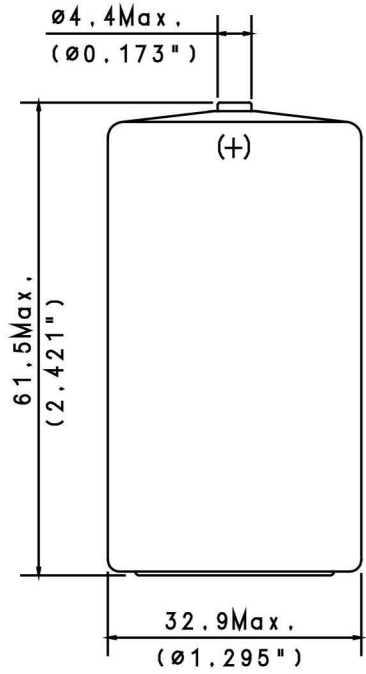

TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5930-21500
SUFFIX- /T SOLDER TABS	15-5930-31500

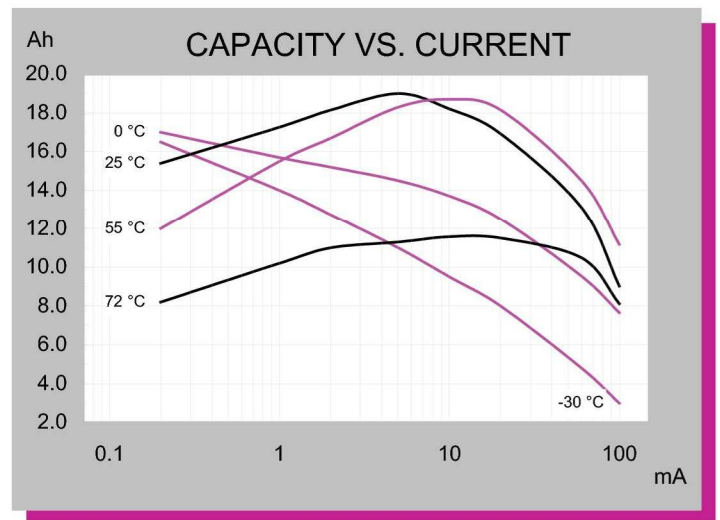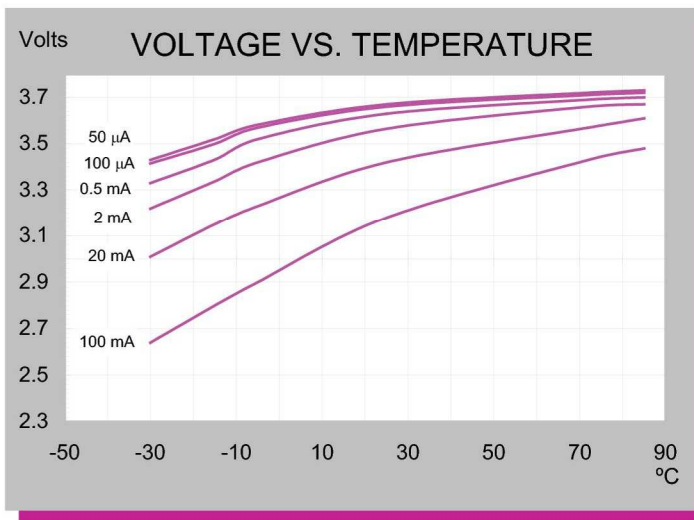

iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 REV. C 11/08