


MODEL TL-5937

International size reference: DD, ER32L1245

TECHNICAL DATA




(Typical values @+ 25°C for batteries stored for one year or less)

■ Nominal capacity @ 10 mA, to 2 V	35 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	450 mA
■ Maximum pulse current capability	1000 mA
■ Weight	190 g (6.702 oz)
■ Volume	105 cc
■ Operating temperature range	-55 °C to +85 °C
■ Li metal content	approx. 10 g
■ U.L. Component Recognition, MH 12193	

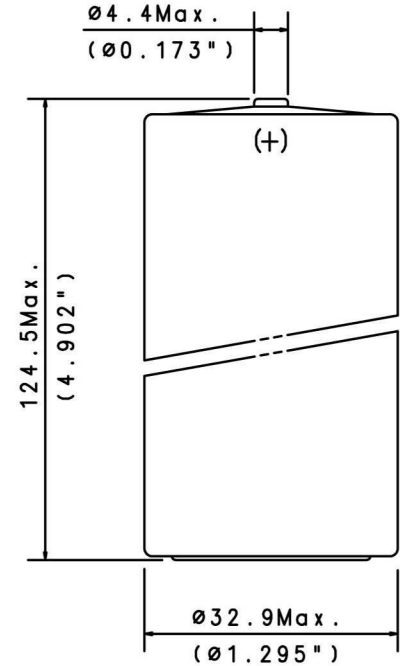

TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5937-21500
SUFFIX- /T SOLDER TABS	15-5937-31500

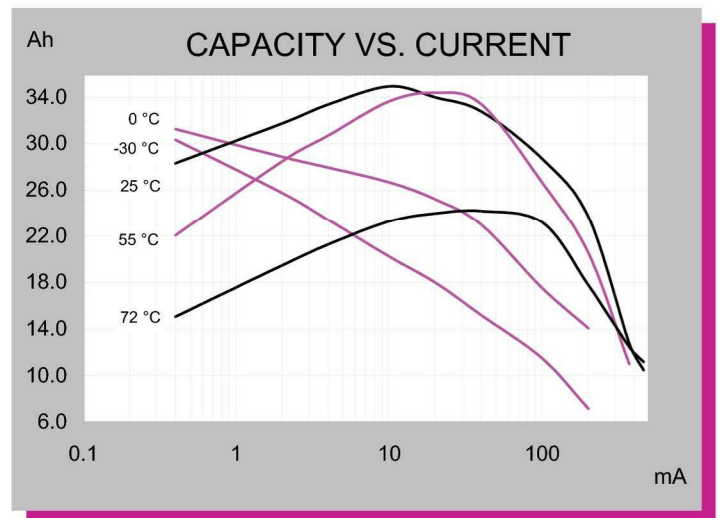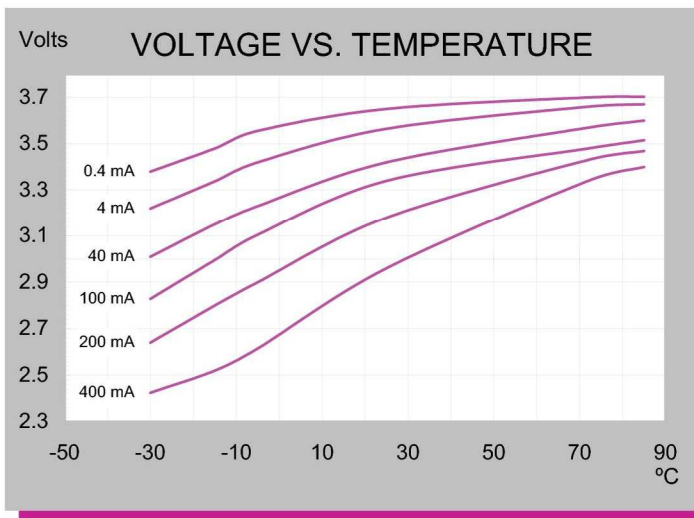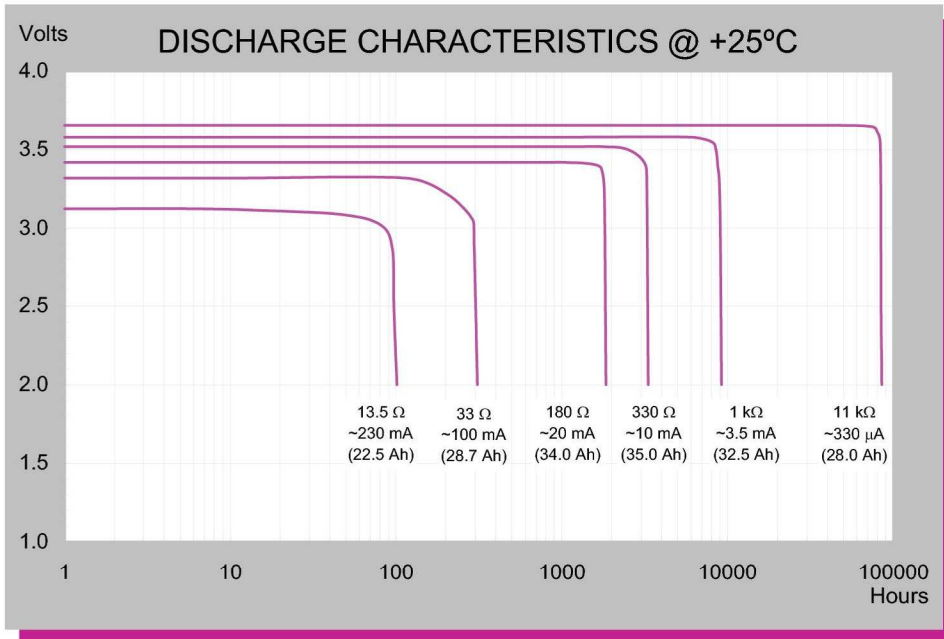

iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. ECN 1501879 Rev. B 11/08