

# MODEL TLL-5902



International size reference: 1/2AA, ER14252

## TECHNICAL DATA

(Typical values @+25 °C for batteries stored for one year or less)



■ Nominal capacity @ 1 mA, to 2V	1.1 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	50 mA
■ Maximum pulse current capability	100 mA
■ Weight	9.6 g (0.339 oz)
■ Volume	4 cc
■ Operating temperature range	-55 °C to +85 °C
■ Li metal content	approx. 0.35 g
■ U.L. Component Recognition, MH 12193	

**TADIRAN**  
**LITHIUM**  
**BATTERIES**

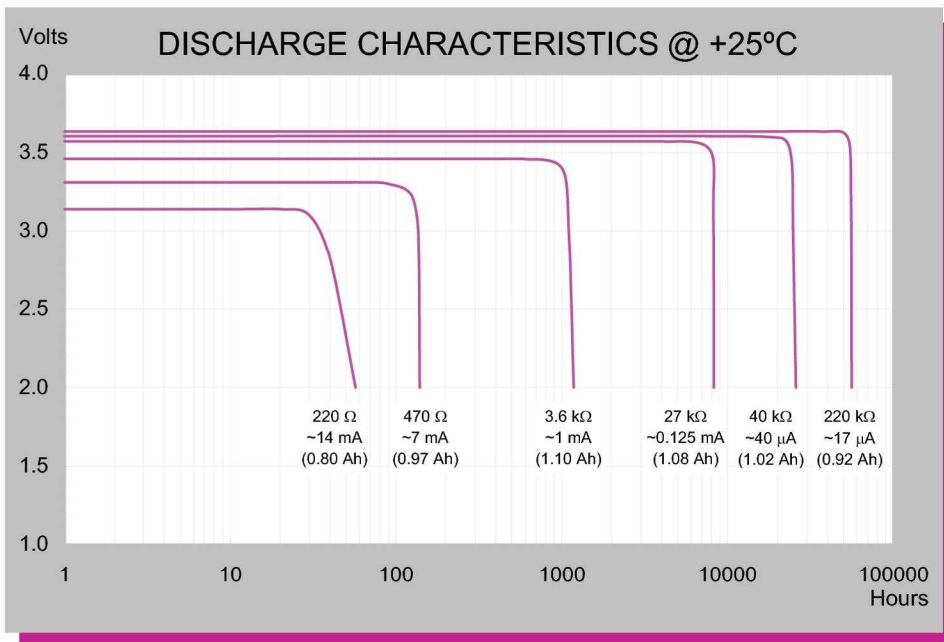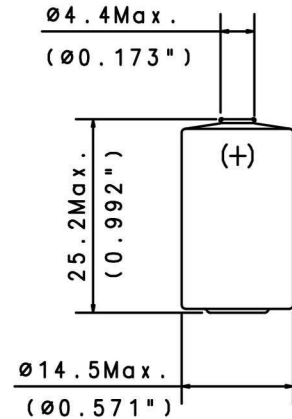

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5902-21530
SUFFIX- /T SOLDER TABS	15-5902-31530
SUFFIX- /P AXIAL PINS	15-5902-41530
SUFFIX- /PT2 RADIAL PINS	15-5902-36530
SUFFIX- /TP POLARIZED TABS	15-5902-52530
SUFFIX- /PT POLARIZED TABS	15-5902-53530

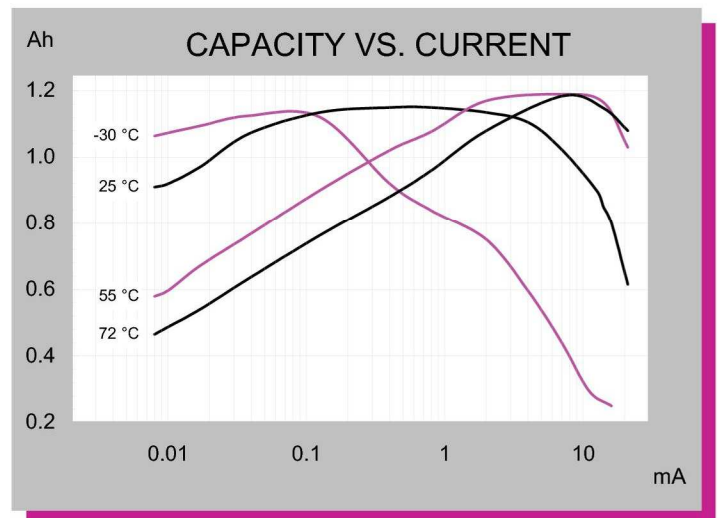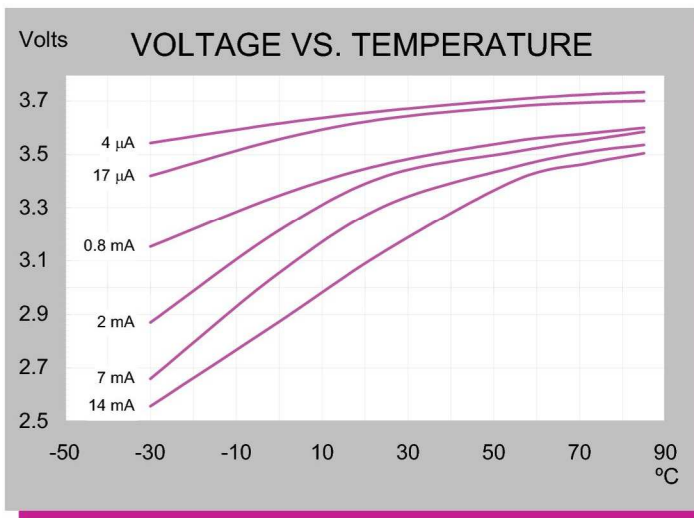

**iXtra - Long Term High Performance**

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. D 11/08