


MODEL TLP-93311/A/SM


The battery is designed specifically for applications requiring low background currents combined with high current pulses. The Pulses Plus™ battery combines the inherent benefits of bobbin type Lithium Thionyl Chloride cell with a novel hermetically sealed Hybrid Layer Capacitor (HLC). The addition of the HLC enhances the performance of the Lithium Thionyl Chloride cell to meet large pulse current requirements, thus providing greater performance and safety in comparison to jellyroll construction (spirally wound) type batteries.

* The PTC is optional and not necessary in many cases.



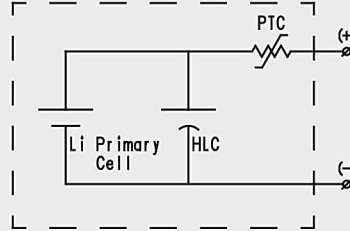


TADIRAN
LITHIUM
BATTERIES

PulsesPlus™

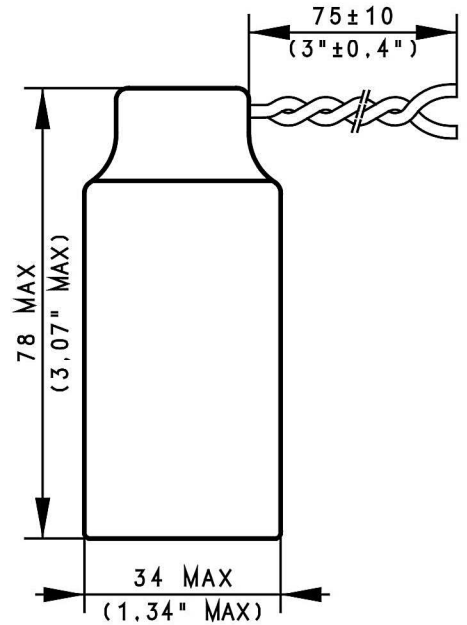

Note: For best performance battery should be mounted in the application in upright or horizontal position.

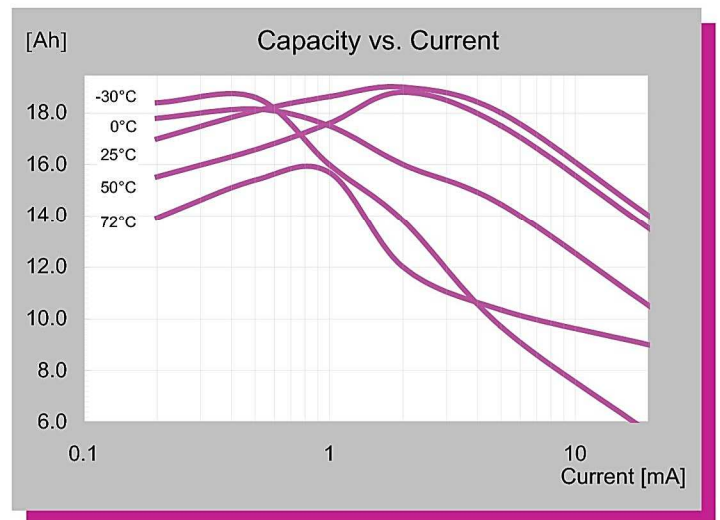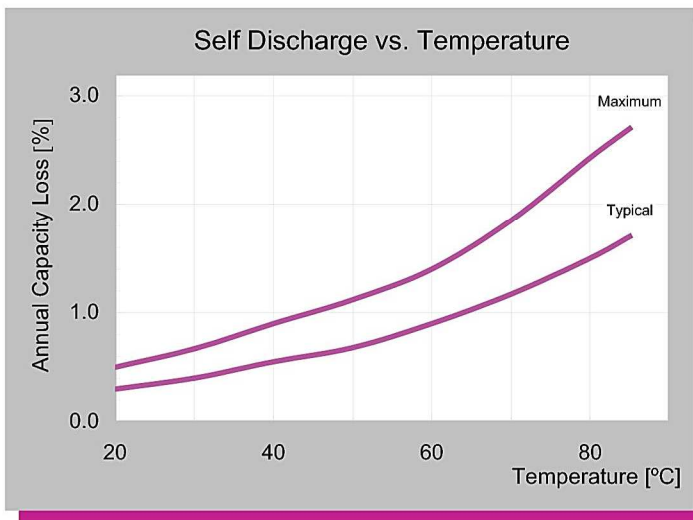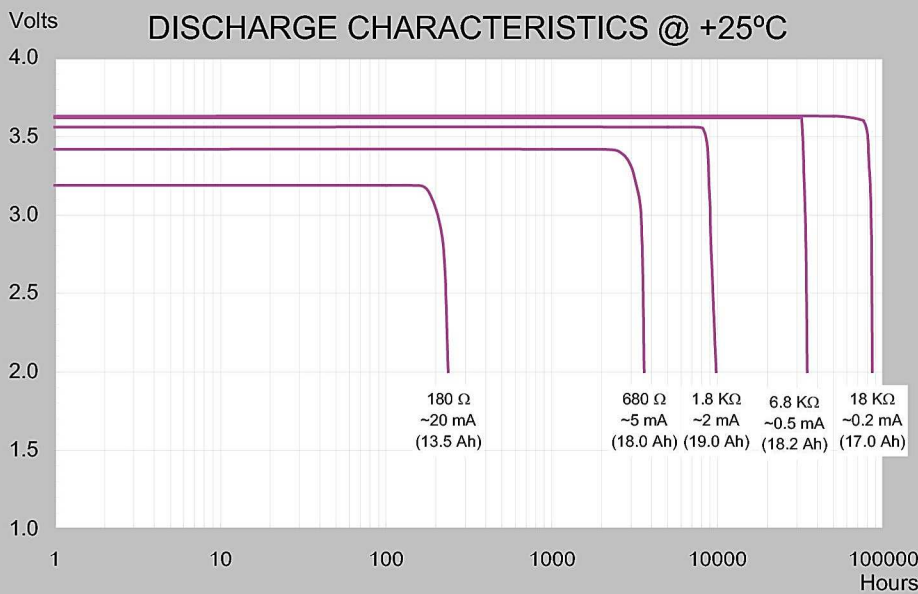

For High Pulse Current Applications

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. C Dec/04